


SANCO®

KME

Once you've used SANCO®
you'll never use anything else.

KME Germany GmbH & Co. KG
SANCO®
[GB]



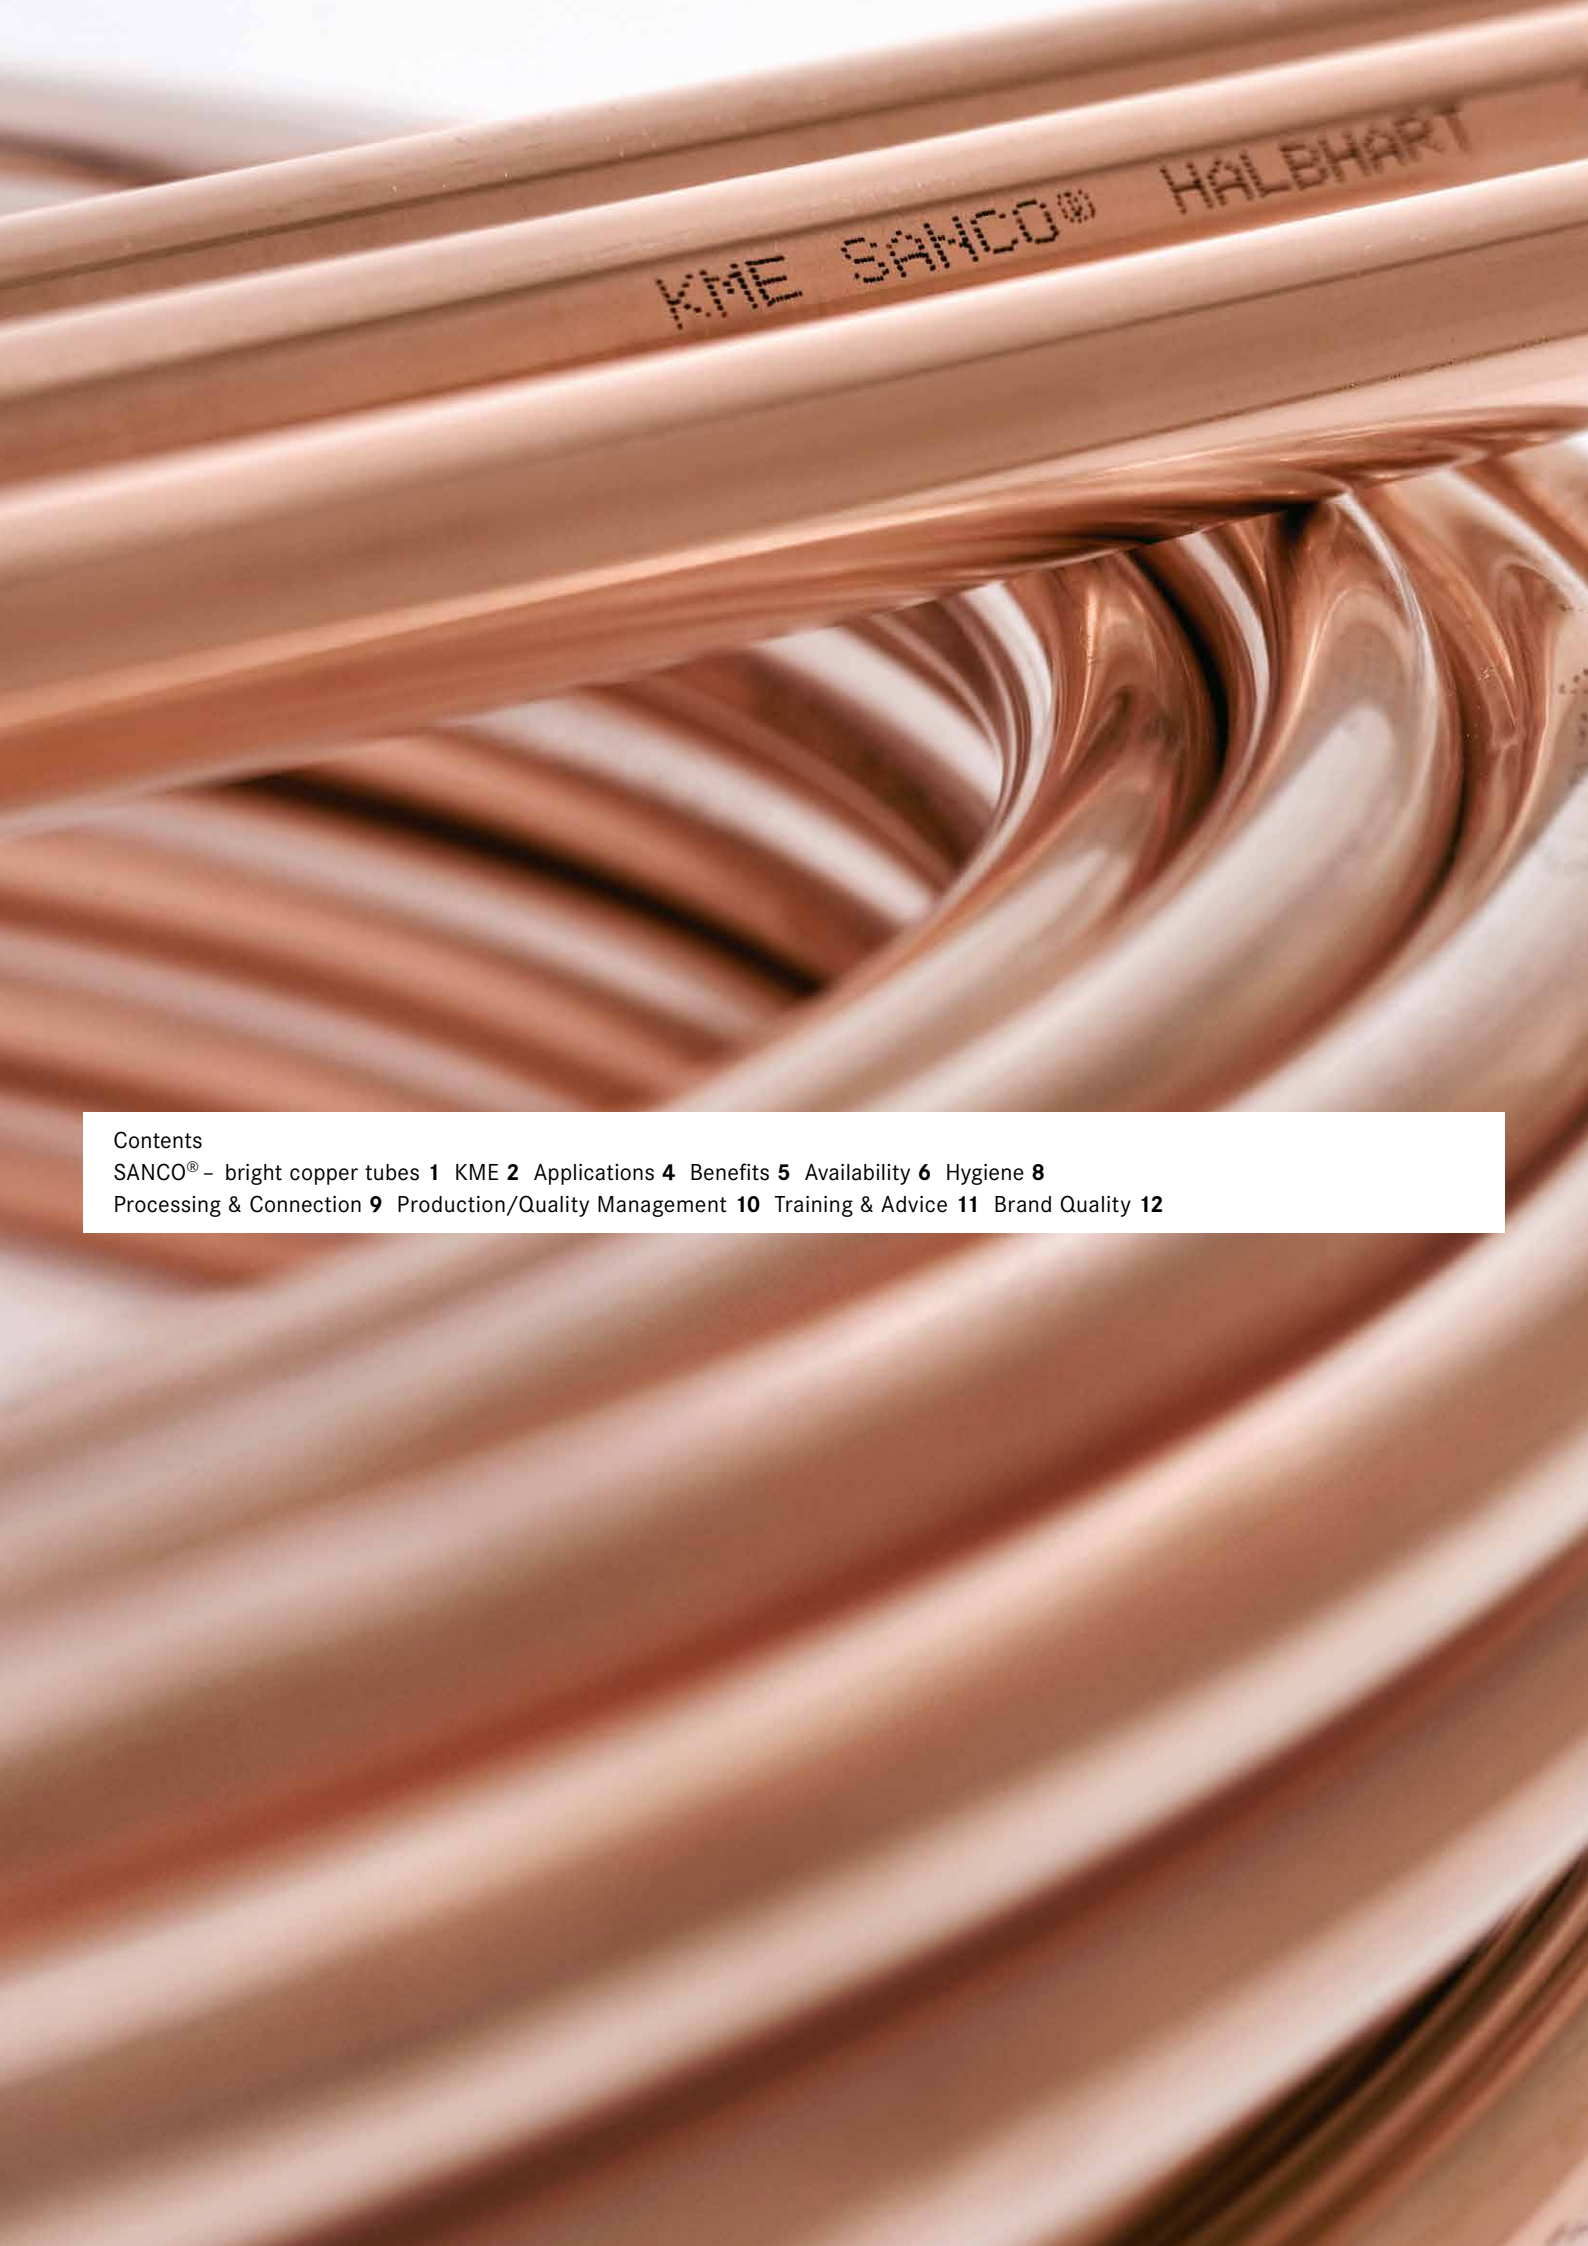

KME SANCO® HALBHART

Contents

SANCO® - bright copper tubes **1** KME **2** Applications **4** Benefits **5** Availability **6** Hygiene **8**

Processing & Connection **9** Production/Quality Management **10** Training & Advice **11** Brand Quality **12**

SANCO® - tubes are made from high-quality copper with a purity grade of at least 99.9%. They are manufactured using a patented process to give the tubes extreme durability and longevity. Our soft, half-hard and hard copper tubes can be used in all areas of domestic plumbing. SANCO® is Europe's leading bright copper plumbing tube.




Once you've used SANCO® you'll never use anything else.






With production facilities in Germany, France, Italy, the UK, Spain and China, KME is one of the world's leading manufacturers of semi-finished goods and copper and copper alloy products. A large part of the copper products for the construction industry is designed for the domestic plumbing industry. KME has a wide range of specially designed and finished tubes for all domestic plumbing applications. KME's product and system solutions fulfill all quality standards, and are reliable and easy to assemble. This, combined with an extensive range of services, makes KME a competent partner for all its customers.

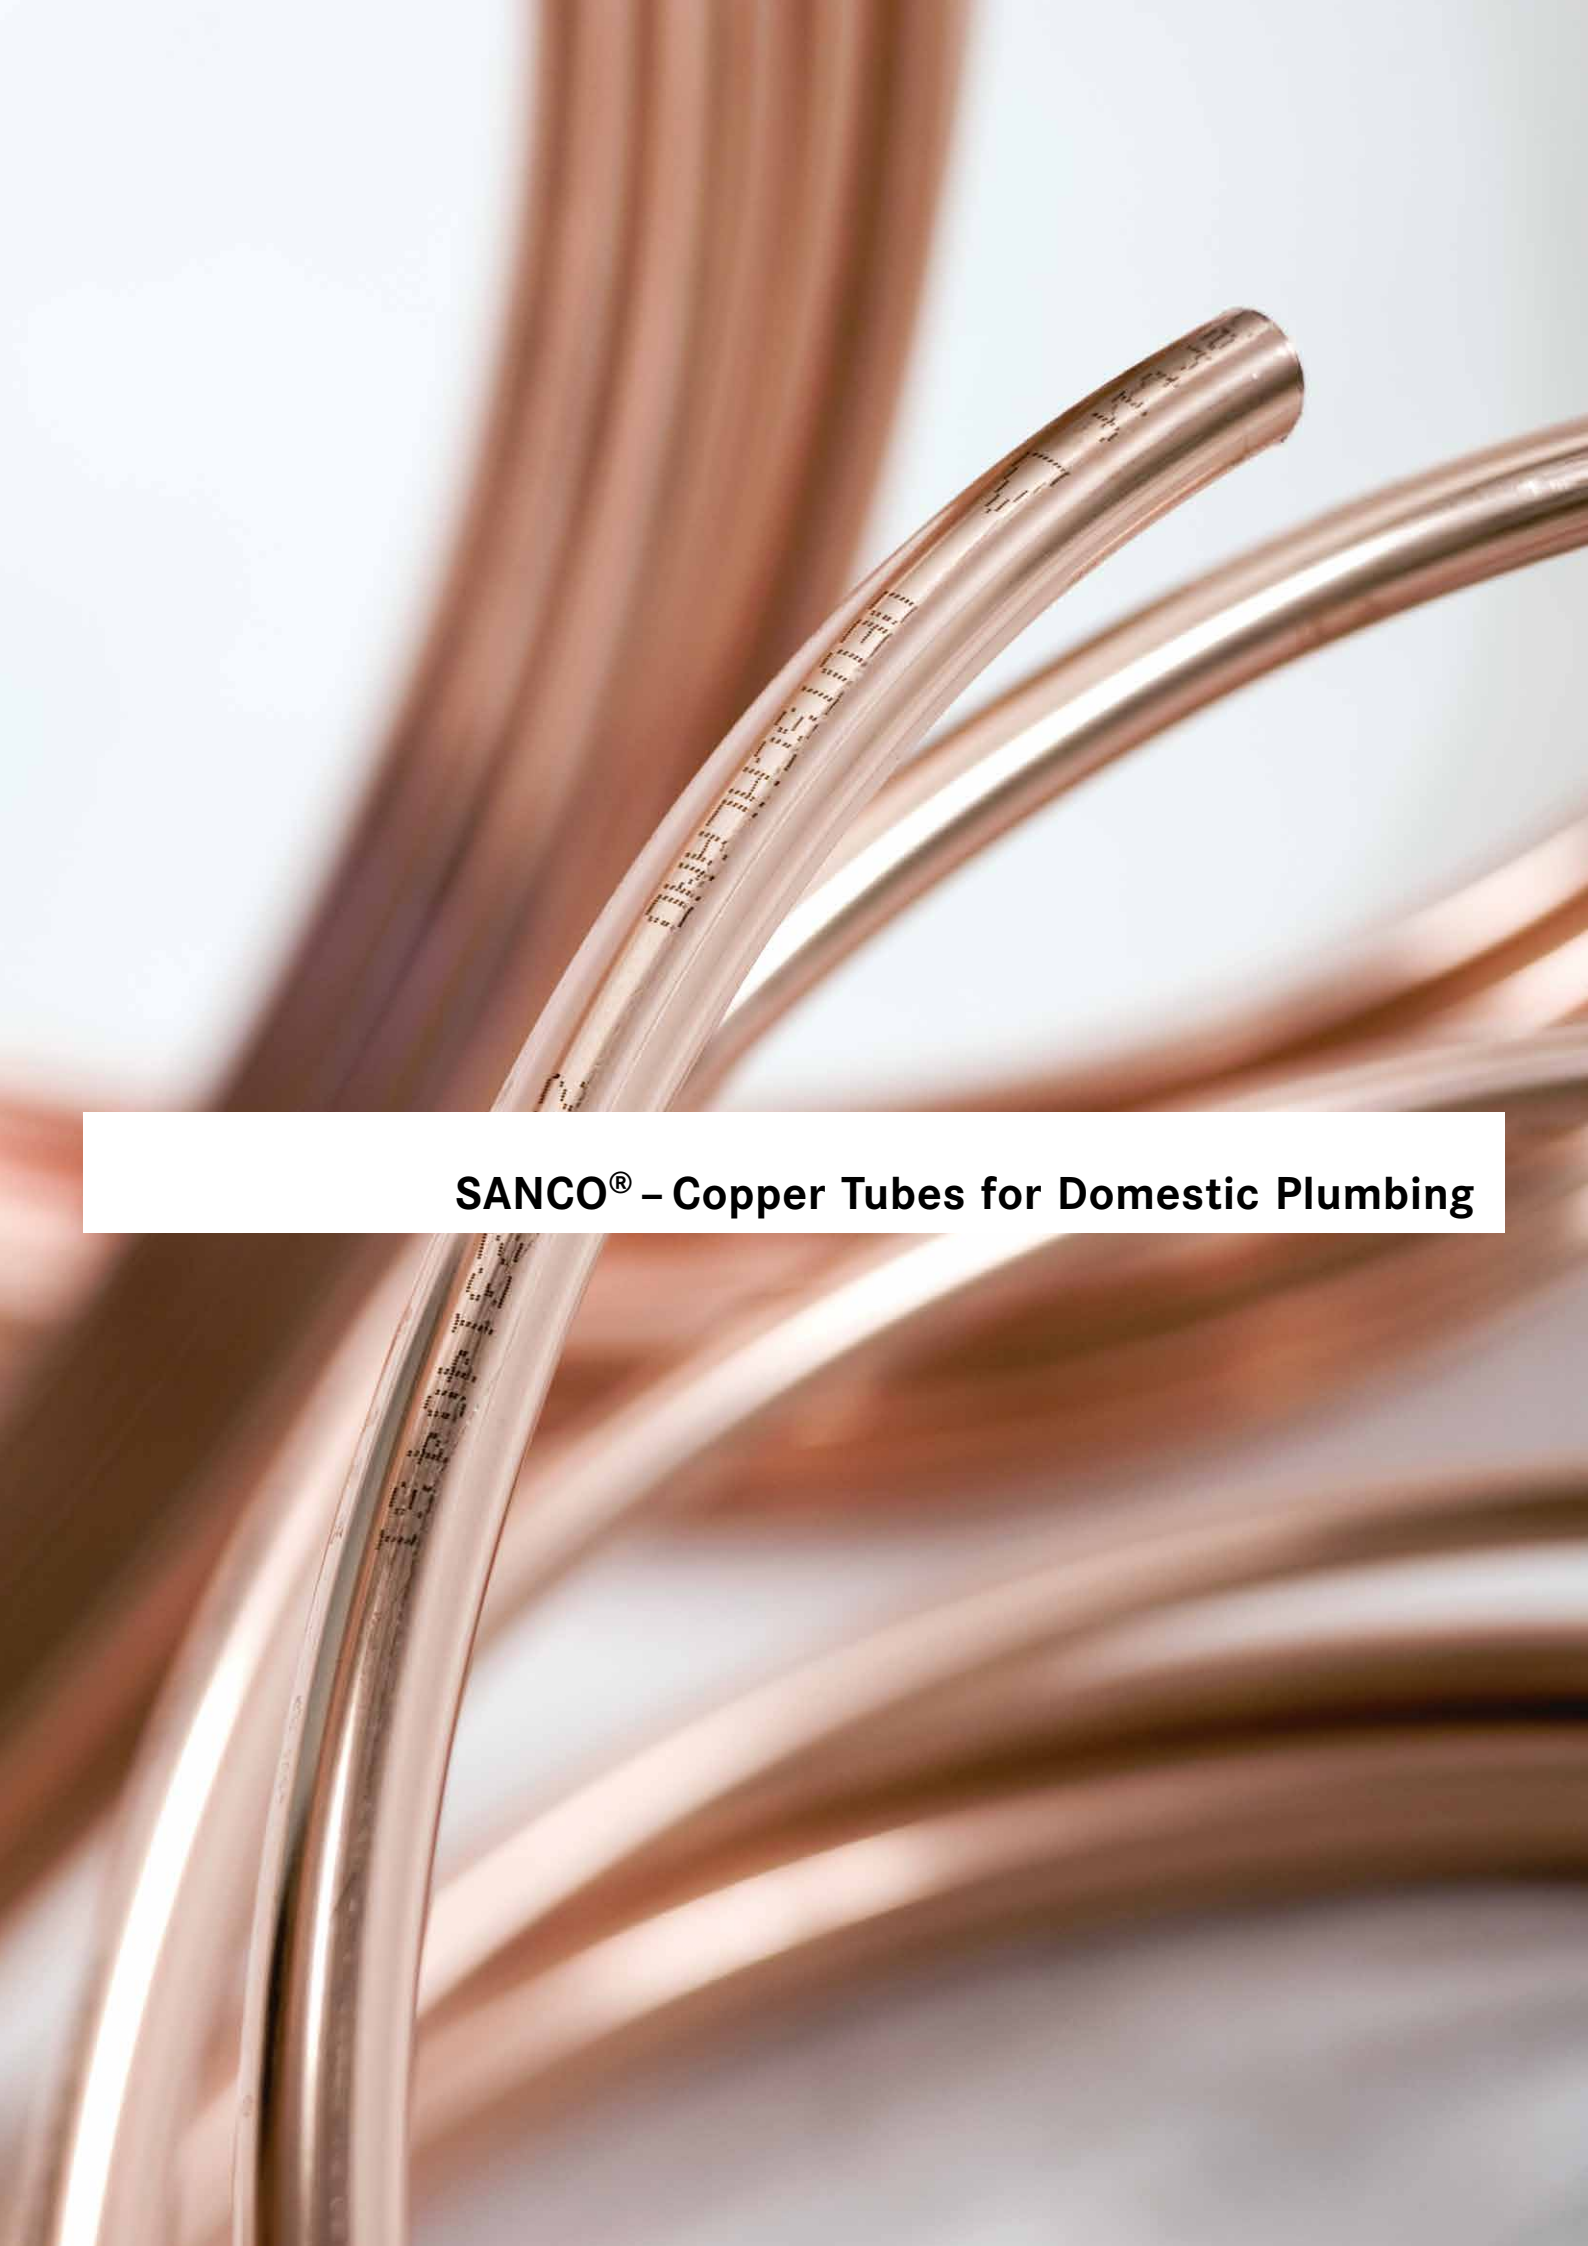A close-up photograph of several copper tubes, likely for plumbing. The tubes are arranged in a way that shows their curved, overlapping nature. They have a bright, metallic copper finish. On the surface of the tubes, there are faint, technical markings that appear to be part of a manufacturing or identification system, possibly including a barcode or a series of small characters. The background is a soft, out-of-focus light blue and white, which makes the copper tubes stand out.

SANCO® – Copper Tubes for Domestic Plumbing

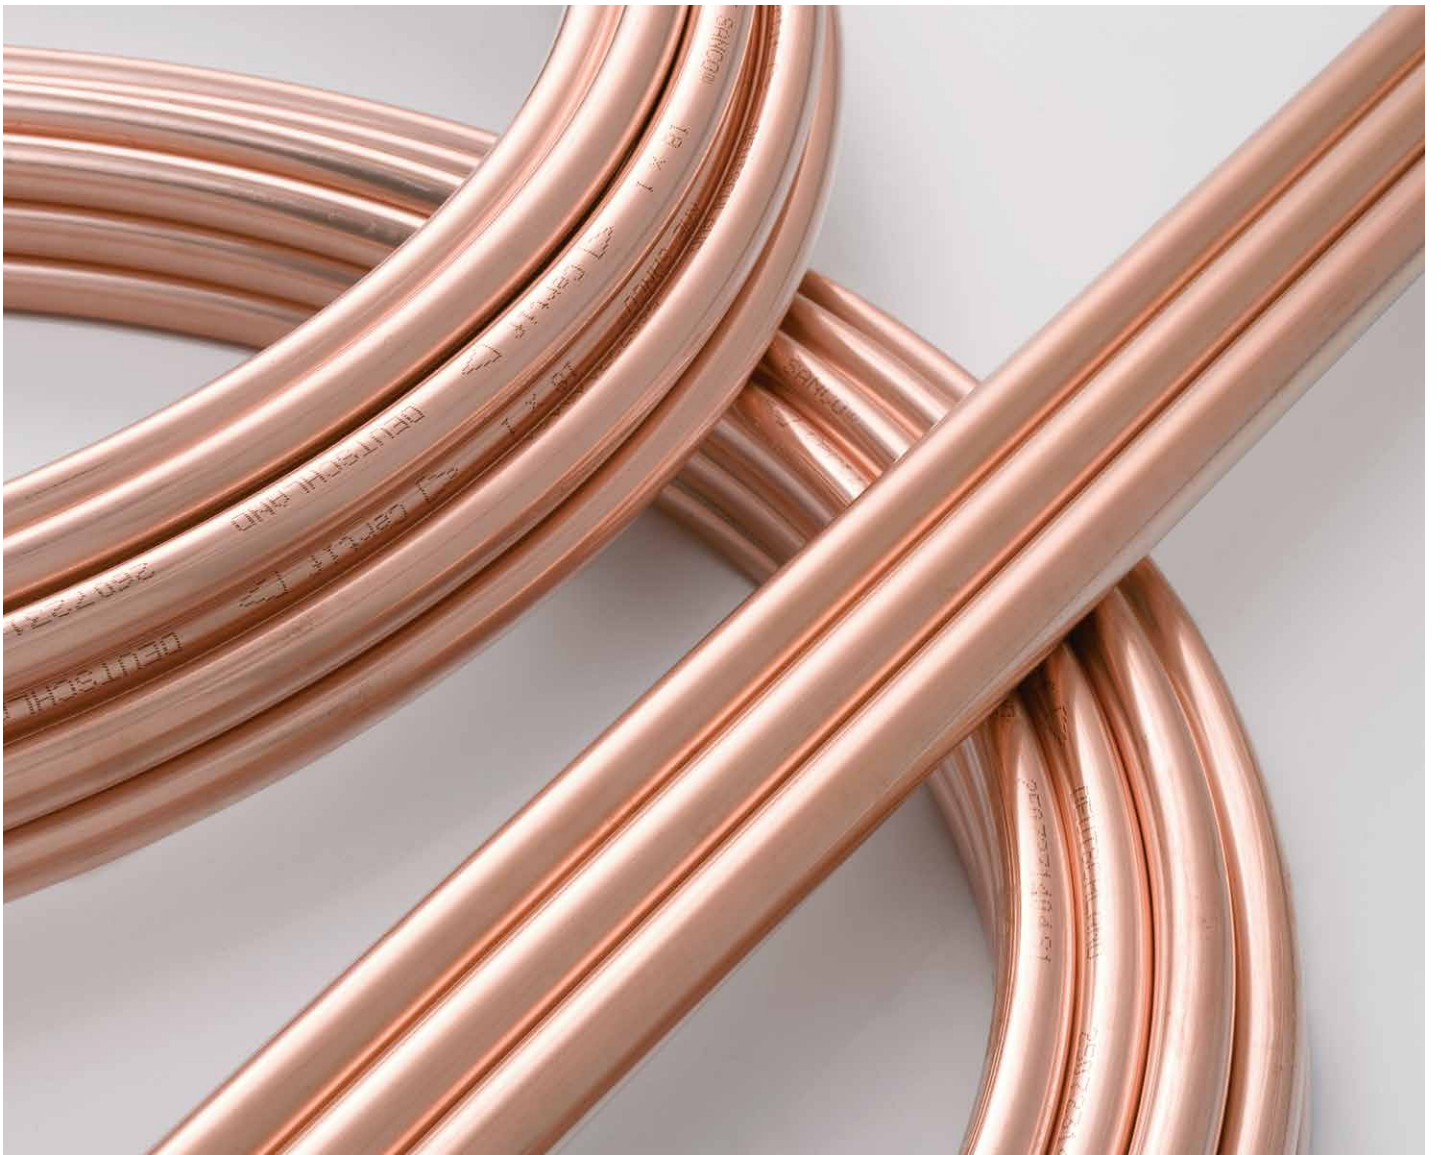

SANCO® – a Tube for Many Different Applications

Product benefits

- One range of tube products covers all areas of application.
- Standard and reliable installation in domestic heating and plumbing systems.
- Compatible with fittings from many different manufacturers.
- No material ageing.
- Gasproof, impervious to oxygen diffusion and UV-resistant.
- Higher quality standard than prescribed by standards and regulations.
- Every single metre can be processed. Tube cutoffs can be fully recycled, so that waste and disposal problems do not arise in the first place.

SANCO® has proven its value in all areas of domestic plumbing and heating

SANCO® – a Tube for Many Different Applications

	SANCO®
Plumbing	
Heating	
Gas	
Liquefied gas	
Oil	
Rainwater	
Solar	
Sprinkler	
Extinguishing water	

The bright, brand name copper tube

Identification


KME	The tube is manufactured by KME Germany GmbH & Co. KG
15 x 1	Tube dimensions in mm
EN 1057	The tube complies with EN 1057
⊙	Simplified quality mark RAL
DV-7204AT2142	Mark of the German Technical and Scientific Association for Gas and Water (DVGW) - for copper tubes according to EN 1057 or GW 392
Germany	Country of manufacture

Lengths of copper tube according to EN 1057

- With quality marks RAL and DVGW DV-7204AT2142 or DV-7204AT2143 up to 108mm outer diameter
DV-7202AT2141 from 133mm outer diameter
- Cu-DHP, R250 (half-hard) and Cu-DHP, R290 (hard)
- Bundled

Copper tube coils according to EN 1057

- With quality marks RAL and DVGW DV-7204AT2142
- Cu-DHP, R220 (soft), in coils
- 6 x 1.0mm to 15 x 1.0mm in 50m coils
18 x 1.0mm to 22 x 1.0mm in 25 m coils

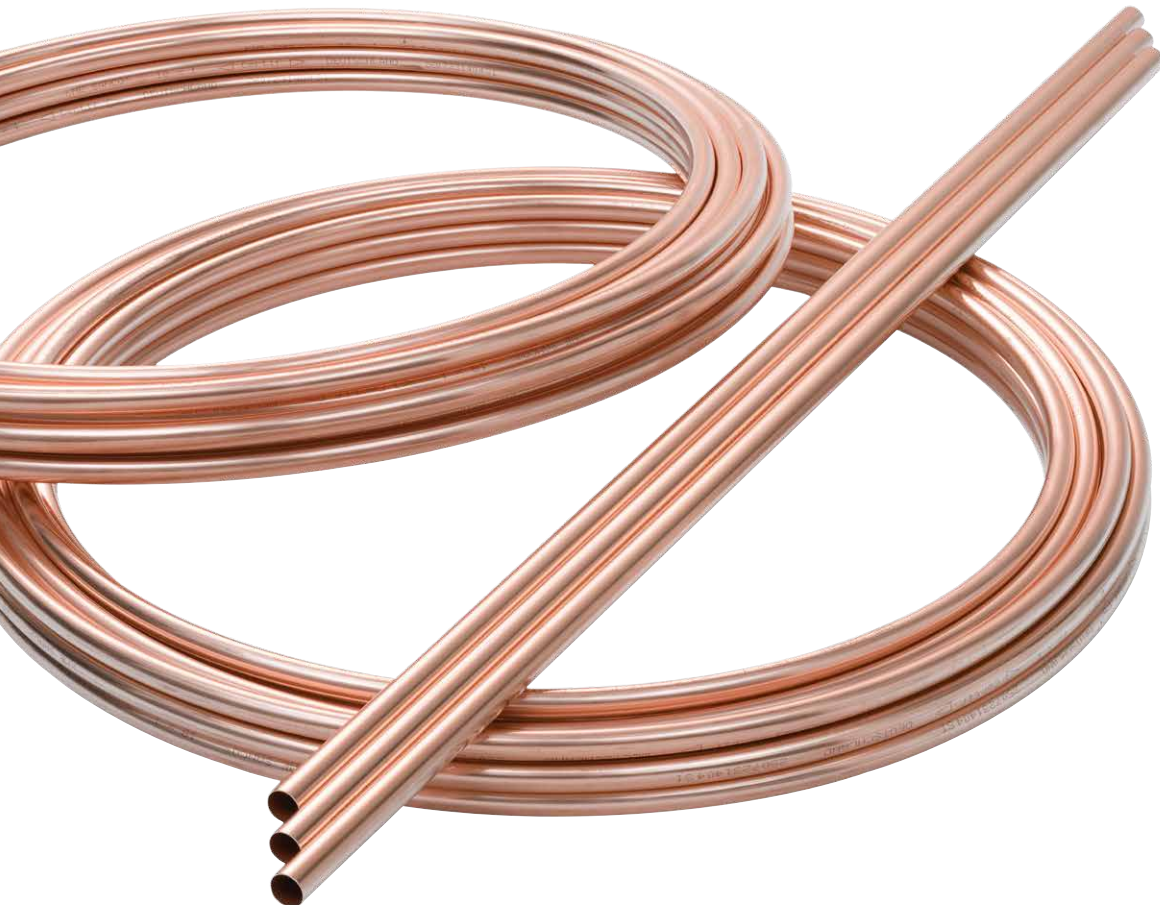

Complete Product Range

SANCO®-copper tubes are suitable for all applications with the same high quality. They are approved with the RAL quality mark and the DVGW seal of quality and can be supplied in coils and straight lengths. Wherever a reliable copper tube is needed, SANCO® is the answer.

Straight lengths (5 m)

Article No.	Dimensions Outer diameter x wall thickness (mm)	Strength	Weight (kg/m)	Permitted working pressure** (bar)	Water volume (l/m)
7011277	6,0 x 1,0*	R 290	0,140	229	0,013
7011278	8,0 x 1,0*	R 290	0,196	163	0,028
7011279	10,0 x 1,0*	R 290	0,252	127	0,050
7011411	12,0 x 1,0	R 250	0,308	104	0,079
7011412	15,0 x 1,0	R 250	0,391	82	0,133
7011413	18,0 x 1,0	R 250	0,475	67	0,201
7011414	22,0 x 1,0	R 250	0,587	54	0,314
7011421	28,0 x 1,0	R 250	0,755	42	0,531
7103779	35,0 x 1,2	R 290	1,134	35	0,835
7103783	42,0 x 1,2	R 290	1,369	29	1,232
7011371	54,0 x 1,5	R 290	2,202	28	1,963
7011437	64,0 x 2,0	R 290	3,467	37	2,043
7011439	76,1 x 2,0	R 290	4,144	31	4,083
7011441	88,9 x 2,0	R 290	4,859	26	5,661
7011442	108,0 x 2,5	R 290	7,374	27	8,332
7011443	133,0 x 3,0	R 290	10,904	26	12,668
7011444	159,0 x 3,0	R 290	13,085	22	18,385
7011445	219,0 x 3,0	R 290	18,118	16	35,633
7011446	267,0 x 3,0	R 290	22,144	13	53,502

Coils (50 m)

Article No.	Dimensions Outer diameter x wall thickness (mm)	Strength	Weight (kg/m)	Permitted working pressure** (bar)	Water volume (l/m)
7011218	6,0 x 1,0*	R 220	0,140	229	0,013
7011219	8,0 x 1,0*	R 220	0,196	163	0,028
7011220	10,0 x 1,0*	R 220	0,252	127	0,050
7011222	12,0 x 1,0	R 220	0,308	104	0,079
7011227	15,0 x 1,0	R 220	0,391	82	0,133
7011232	18,0 x 1,0	R 220	0,475	67	0,201

Coils (25 m)

Article No.	Dimensions Outer diameter x wall thickness (mm)	Strength	Weight (kg/m)	Permitted working pressure** (bar)	Water volume (l/m)
7011231	18,0 x 1,0	R 220	0,475	67	0,201
7011234	22,0 x 1,0	R 220	0,587	54	0,314

R220 = soft, R250 =semi- hard, R290 = hard

* These dimensions are not included in GW 392. This is why they do not have the DVGW mark.

** The maximum permitted working pressure was calculated on the basis of soft copper tubes with $R_m = 200 \text{ N/mm}^2$ and a safety factor of 3,5 at a working temperature of 100°C .

The permitted working pressure relates to the copper tube, not the joint.



Hygiene

Compared to other materials, copper also has hygienic advantages that, which are especially important in drinking water installations. As experience and recent studies have shown, the formation of legionella and other harmful bacteria caused by unfavourable operating conditions is considerably reduced when copper is a part of the system. Additionally, there are no temperature-related limitations for thermal disinfecting as in other materials. With copper, the normal use of disinfecting agents in water such as chlorine is also possible in the concentrations typical for drinking water, even short-term high-chlorination processes of up to 12 hours cause no problems whatsoever.

The Connection Techniques

	SANCO® soft	SANCO® half-hard	SANCO® hard	
Soldering	○	○	○	
Brazing	○	○	○	
Pressing	○	○	○	
Welding	○	○	○	(only from a wall thickness of $\geq 1.5\text{mm}$)
Clamping	○	○	○	
Insertion	○	○	○	

Many people in the plumbing, heating and air-conditioning trades grew up with SANCO® – from their apprenticeship to their master tradesman's certificate. However, these days if you base your prices only on the length of tubing used, and compare this with different tube systems, you may not consider the expensive connection techniques with other materials – and get an unpleasant surprise when the bill arrives. The fact is that SANCO® can be used for every domestic plumbing application and is compatible with the fittings from all major manufacturers. This is the only way that tradesmen can implement complete domestic plumbing installations with just one tube system – at the best value for money. No other tube can make this claim.

All the conventional connection techniques used in domestic plumbing can be used on SANCO® tubes. They can be soldered, brazed, pressed, welded, clamped or inserted; soft, semi-hard and hard tubes can be bent cold.

Even when different systems are compared, SANCO®, with all the benefits of copper, comes out on top.



Manufacture

These days tube manufacturing is a high-tech process. At KME it runs smoothly from the raw material stage through to delivery.

The starting products are refined copper billets delivered from continuous casting plants. These are heated to 950 °C and processed into hollows for further processing by hot pressing or hot skew rolling. Reciprocating rolls then perform the subsequent cold forming. Hard, half-hard and soft copper tubes are produced for domestic plumbing in multi-stage cold-drawing processes.


Quality and Reliability

KME defines quality as a task for every single employee and thus practices effective improvement at every workplace. The commitment of every employee is a vital requirement to ensure that we only put the best copper tubes on to the market. Because of this, KME quality management systems fulfil the ISO-9000 standard, among others. You can only have fully satisfied customers in the long term with complete reliability in the production processes and the quality of the finished products.

On the basis of this responsibility, KME offers all contractors reliable warranty agreements. The manufacturers' system alliance with the ZVSHK (German Central Association Plumbing, Heating, Air Conditioning) and the BHKs (Federal Industrial Association for Heating, Air Conditioning and Sanitary Engineering/Technical Buildings Systems) guarantees maximum reliability.

Reliability is top priority – from the raw material to the finished KME copper tube.



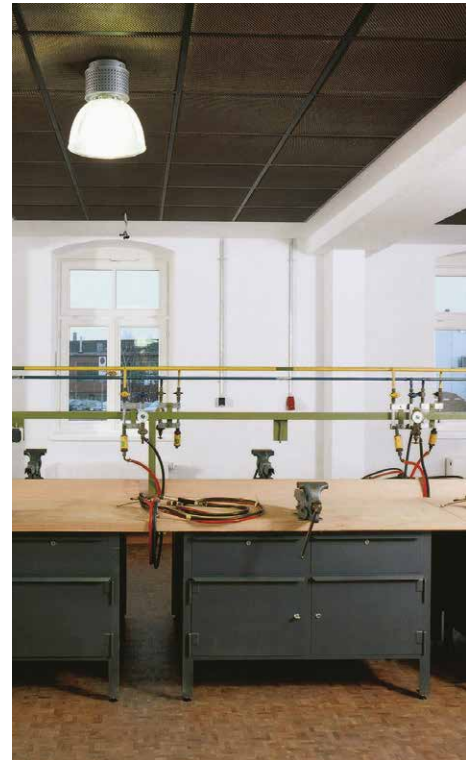

KME Plumbing Tubes – Training and Advice

High-quality brand name products have to be processed properly so that quality standards and reliability can be guaranteed. As a leading manufacturer of brand name copper tubes in Europe, KME not only offers the widest product range, but also the best support.

We pass on our many years of experience with copper plumbing tubes to contractors in the plumbing, heating, and air-conditioning industries in numerous seminars. The content of the seminars is always up to date and can be used in practical application. In addition to theoretical fundamentals, the seminars also deal with practical planning and installation of plumbing and heating systems with brand name copper tubes. Our specialist seminars are held by experienced trainers. They also offer extensive advice for all issues relating to KME brand name copper tubes.



WICU® Eco



Qtec®
SANCO® INSIDE



cuprotherm® PLAN

Brand Name Quality from KME

Brand name tubes from KME prove their reliability in many different applications: The heat insulated **WICU® Eco** tube in heating and hot water systems, the innovative, flexible and lightweight **Q-tec®** tube for all domestic plumbing applications and under-floor heating systems and the **cuprotherm® PLAN** tube system for wall heating.

All SANCO® products are sold through traditional channels
– from the manufacturer to plumbing, heating and air
conditioning wholesalers and from there to the trades.

If you have any questions, staff in the Plumbing Tubes
division will be pleased to help you.

KME Germany GmbH & Co. KG

Plumbing Tubes

Klosterstraße 29

49074 OSNABRÜCK

GERMANY

Fon +49 541 3 21-4329

Fax +49 541 3 21-82010

www.kme.com

sanco-tubes@kme.com

Sales & Service

KME Germany GmbH & Co. KG

Plumbing Tubes

P.O. Box 3320

49023 OSNABRÜCK

Klosterstraße 29

49074 OSNABRÜCK

GERMANY

Fon +49 541 321-2024

Fax +49 541 321-82024

www.kme.com

info-rohre@kme.com

Plumbing Tubes

