
950 L-key, metric, chrome-plated, 24 x 224 mm

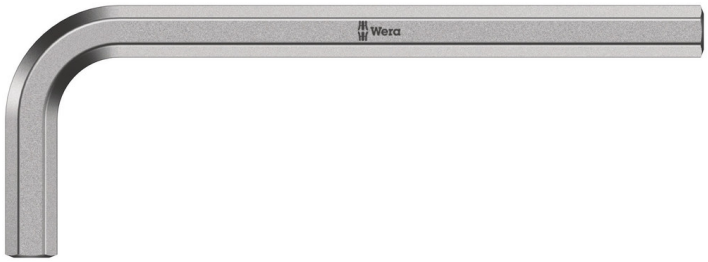

EAN:	4013288018465	**Size:**	224x90x27 mm
Part number:	05021105001	**Weight:**	1230 g
Article number:	950	**Country of origin:**	DE (05)
		Customs tariff number:	82041100

- L-keys for hexagonal socket screws
- Wear-resistant size marking
- High corrosion protection thanks to chrome-plating
- Metric

Premium L-key for hexagonal socket screws. The thoroughly chrome-plated design guarantees high corrosion protection.

Web link

Wera Werkzeuge GmbH
Korzerter Straße 21-25
D-42349 Wuppertal
Tel:
E-Mail:

L-Keys



We questioned the classic L-key design, since all too often the screw head recess is rounded out, meaning screws can no longer be tightened or loosened - and so the user finds the L-key slipping out of the recess. Wera Hex-Plus tools have a larger contact surface in the screw head. The notching effects are reduced and thereby the deformation of the screws. At the same time, as much as 20 % more torque can be applied.

Hex-Plus



Hexagon screws can endure a problem because the contact surfaces delivering the power from the conventional tool, is transferred to the screw via very small surface areas. The consequence: the screw can become damaged (rounding out). Hex-Plus tools have a greater contact surface that prevents this from happening! At the same time, as much as 20 % more torque can be applied. Good to know: Hex-Plus tools fit into every standard hexagon socket screw!

Size identification



The size of each L-keys has been engraved by a laser. In addition Take it easy L-keys have a colour coding according to sizes - for simple and rapid accessing of the required tool. Making it easy to find the right tool.

Surface protection



Chrome-plated hexagon L-keys for outstanding surface protection and long service life. High corrosion protection.

Web link

Wera - 950
05021105001 - 4013288018465

Wera Werkzeuge GmbH
Korzerter Straße 21-25
D-42349 Wuppertal
Tel:
E-Mail:

Further versions in this product family:

	 mm	 mm	 mm	 inch	 inch
05021005001[1]	1.5	45	14	1 3/4"	9/16"
05021010001	2.0	50	16	2"	5/8"
05021015001	2.5	56	18	2 7/32"	23/32"
05021020001	3.0	63	20	2 1/2"	25/32"
05021025001	3.5	66	23	2 5/8"	29/32"
05021030001	4.0	70	25	2 3/4"	1"
05021035001	4.5	75	26	3"	1 1/32"
05021040001	5.0	80	28	3 1/8"	1 3/32"
05021045001	6.0	90	32	3 1/2"	1 1/4"
05021050001	7.0	95	34	3 3/4"	1 5/16"
05021055001	8.0	100	36	4"	1 7/16"
05021060001	9.0	106	38	4 3/16"	1 1/2"
05021065001	10.0	112	40	4 7/16"	1 9/16"
05021070001	11.0	120	43	4 3/4"	1 11/16"
05021075001	12.0	125	45	5"	1 3/4"
05021080001	13.0	132	50	5 3/16"	2"
05021085001[1]	14.0	140	56	5 1/2"	2 7/32"
05021090001[1]	17.0	160	63	6 5/16"	2 1/2"
05021095001[1]	19.0	180	70	7 1/16"	2 3/4"
05021100001[1]	22.0	200	80	8"	3 1/8"
05021105001[1]	**24.0**	**224**	**90**	**9"**	**3 1/2"**
05021110001[1]	27.0	250	100	10"	4"

1) Regular hexagon

Web link

Wera Werkzeuge GmbH
Korzerter Straße 21-25
D-42349 Wuppertal
Tel:
E-Mail: